



MAXIVOLT.COM  
SERIOUS SURGE PROTECTION®

# GUARDDOG® WRG-400P


- Primary and Secondary Protection Levels
- Dual Listings - ANSI/UL 1449 Ed. 3 / IEC 61643-11
- SenseTech® Communication Options
  - Audible Alarm, Form C Dry Contacts, Remote Light Contacts
- NEMA® 4X Rated Enclosure Standard
- Surge Counter Option Available
- Primary and Secondary Safety Fusing
- 5 Year Repair / Replace SPD Warranty




WRG-400P Surge Protective Device



Maxivolt GuardDog® • Made in USA • Serious Surge Protection • Made in USA • Maxivolt GuardDog® • Made in USA • Serious Surge Protection • Made in USA • Maxivolt GuardDog®

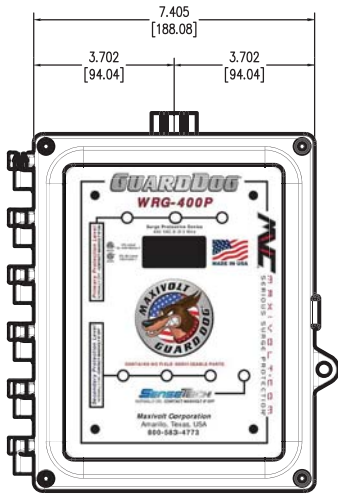

Approx. 9.5"H 8.7"W 5.6"D

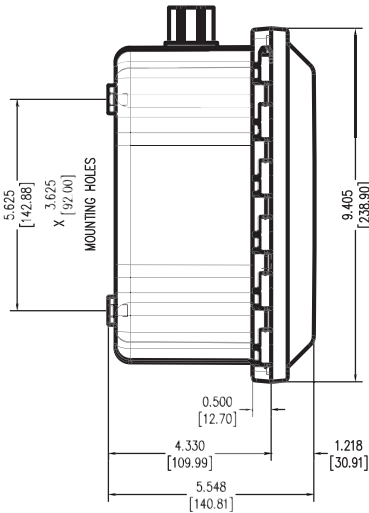

### Application

Voltage 480 VAC  
Configuration 3 Ø / 3 Wire

### Characteristics

Fusing Internal  
Indication Blue LEDs On / Red Neons Off  
Conductor 12 AWG Stranded  
Enclosure NEMA® Type 4X

### Certifications

Listing ANSI/UL 1449 Ed. 3 / IEC 61643-11  
Environmental RoHS

### Specifications


Modes of Protection L-L  
Type (Class) II (2)  
Clamp Voltage [1 mA] 1020  
VPL [2kA] 1600  
VPR [3kA] 2000  
SCCR 100 kA  
MCOV 600  
Operating Temperature -40° C to 85° C  
Operating Humidity 1% to 95%  
Filtering UL 1283  
EMI-RFI Noise Attenuation < 40 db  
Capacitance 1 to 1.5 µF / Line  
Component Response Time < 1 ns  
Frequency Range 50 - 400 HZ

### Standard Installation Summary

Install According To Instructions Provided With Device

1. Remove 3/4" knockout.
2. Mount using mounting feet with proper anchors.
3. Connect one red conductor to phase A.
4. Connect other red conductor to phase B.
5. Connect last red conductor to phase C.

- Note:** Mount close as possible to connection points
- Note:** Breaker Size 15 amp (if required).
- Note:** Never add length to provided conductors.
- Note:** For optimum SPD performance minimize conductor length and avoid sharp bends.



Maxivolt Corporation  
800 South Rusk Street  
Amarillo, Texas, USA

(806) 371-0722  
(800) 583-4773  
www.maxivolt.com